



idisgo lite

firmware upgrade version 3.196
&
Windows 98 drivers





Table of contents

1. Introduction.....	3
2. System requirements.....	3
3. Upgrading the firmware.....	4
3.1 Installing the firmware/driver.....	4
3.2 Putting the idisgo in Recovery Mode and Upgrading the firmware .	4



1. Introduction

The idisgo firmware/driver upgrade, version 3.196, is intended for idisgo lite MP3 player only; this model was discontinued December 2005. Installing it on any other device may harm it and render it unusable.

If you are unsure of the model of idisgo lite you have, email technical@mydisgo.com with the serial number to confirm the model. The serial number is located in the battery compartment.

This upgrade driver is also the Windows 98 Second Edition driver. If you are installing for the driver only, you need to just follow the instructions of section 3.1 and then plug the idisgo into the USB port of the computer.

Installation of the driver on Windows ME, Windows 2000 and Windows XP is only required when upgrading the firmware of the player.

Upgrading the firmware will resolve the problem of the error message "Incorrect format, reformat the player"

2. System requirements

- Windows 98 Second Edition;
- Windows ME;
- Windows 2000, Service Pack 3 or above;
- Windows XP;



3. Upgrading the firmware

Before upgrading the firmware ensure you have backed up all files on the idisgo. This procedure reformats the device, which erases all information on the player.

Do not plug the idisgo into the USB port of the computer until section 3.2 of the procedure.

3.1 Installing the firmware/driver

You need only carry out this part of the procedure if you are installing the drivers for Windows 98 Second Edition.


1. Download the driver/firmware upgrade from the link provided in the e-mail;
2. Double click the **idisgo-driver.exe** file;
3. Click on **Unzip** to extract the files;
4. The files will be extracted into a folder called idisgo-driver;
5. You will find the set up file in **idisgo-driver\idisgov3.196\setup.exe**;
6. Double click the **setup.exe** file;
7. The installer will launch, click on **Next**;
8. Click on **Yes**, at the license agreement;
9. Click **Next**, at the Destination Folder Location window;
10. Click **Next**, at the Select Program folder window;
11. The firmware will install, and then click on **Finish**;

If you are only installing the driver plug the disgo into the USB port now. If you are installing to upgrade the firmware, or to resolve a problem, continue to Section 3.2, do not plug the idisgo in until instructed to.

3.2 Putting the idisgo in Recovery Mode and Upgrading the firmware

1. Remove the battery from the battery compartment;
2. Press and hold the play button, do not release until step 4;
3. Plug the player into the USB port of your computer;
4. Hold for 5 seconds and release the play button;
5. Leave the idisgo in the computer for the following steps;

6. Click on Start > Programs > SigmaTel MSCN Audio Player > Firmware Download to launch the upgrade program;
7. The following window will pop up

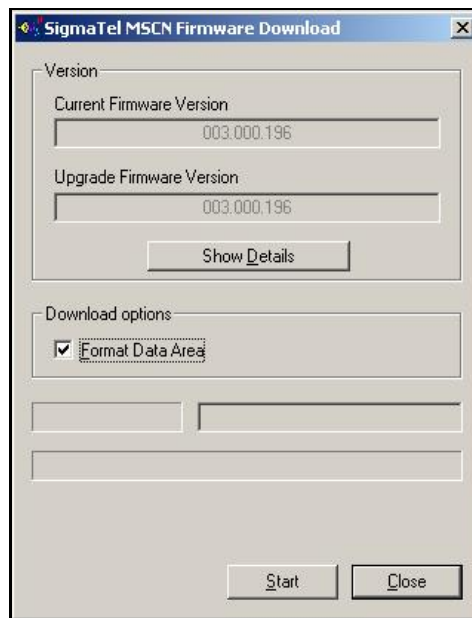

8. Put a check in the **Format Data Area** box;
9. Click on **Start** to begin the upgrade process;
10. When it has completed it will say Completed below the Format Data Area check mark, then click on **Close**;